

USER'S MANUAL

DHD DVR P2P Version 1.0

P2P Connectivity

With easily QR code settings, user can monitor DVR's video with mobile devices(iOS / Android) or PCs over the internet from anywhere.

Model

Only DHD208,DHD216,DHD204A,DHD208A and DHD216A support P2P feature.

Setup

1. Turn on DHD DVR, and open the **Network Setup** page, as below operation:
Main control panel ► Configuration ► Network Setup
2. In lower part of **Network Setup** page, input **P2P Access Key** in 'Apply Key' field and click 'Apply' button.

The screenshot shows the 'Network Setup' page with tabs for HTTP, DDNS, NTP, Mail Setup, and FTP. The 'Enable' checkbox is checked. The 'Port' is set to 80. The 'Apply Key' field contains the string 'XQAFUFG1R6FRBZ1KUPFW2E7MQI' and the 'Apply' button is highlighted with an orange box.

Important: If you don't have **P2P Access Key**, please contact your provider.

3. Click 'OK' button return to Configuration.

The screenshot shows a dialog box with two buttons: 'OK' and 'Cancel'. The 'OK' button is highlighted with an orange box.

4. Open the **System Information** page, as below operation:
Main control panel ► Configuration ► System Information

5. Under **Network** tag, will see QR code, and P2P ID.

The screenshot shows the 'System Information' page with a 'Network' tag. The 'IP' is 192.168.3.190 and the 'MAC' is 00:0F:FC:10:00:01. The 'QR Code' and 'P2P ID' are highlighted with an orange box. The P2P ID is 28KDCNBY2MU7BNTYS81D.

Connection


Netviewer with Windows

On **Connect Interface**, input **P2P ID** in 'Host' field, and input the rest of fields as appropriate, then click 'Connect' button.


Host: 28KDGNDY2MU7BNTYS81D
Port: 80
User: admin
Password: ●●●●●●
Connect

Netviewer with iOS / Android

1. For iOS / Android devices, click '+' on iOS or 'New' on Android to add a new device.

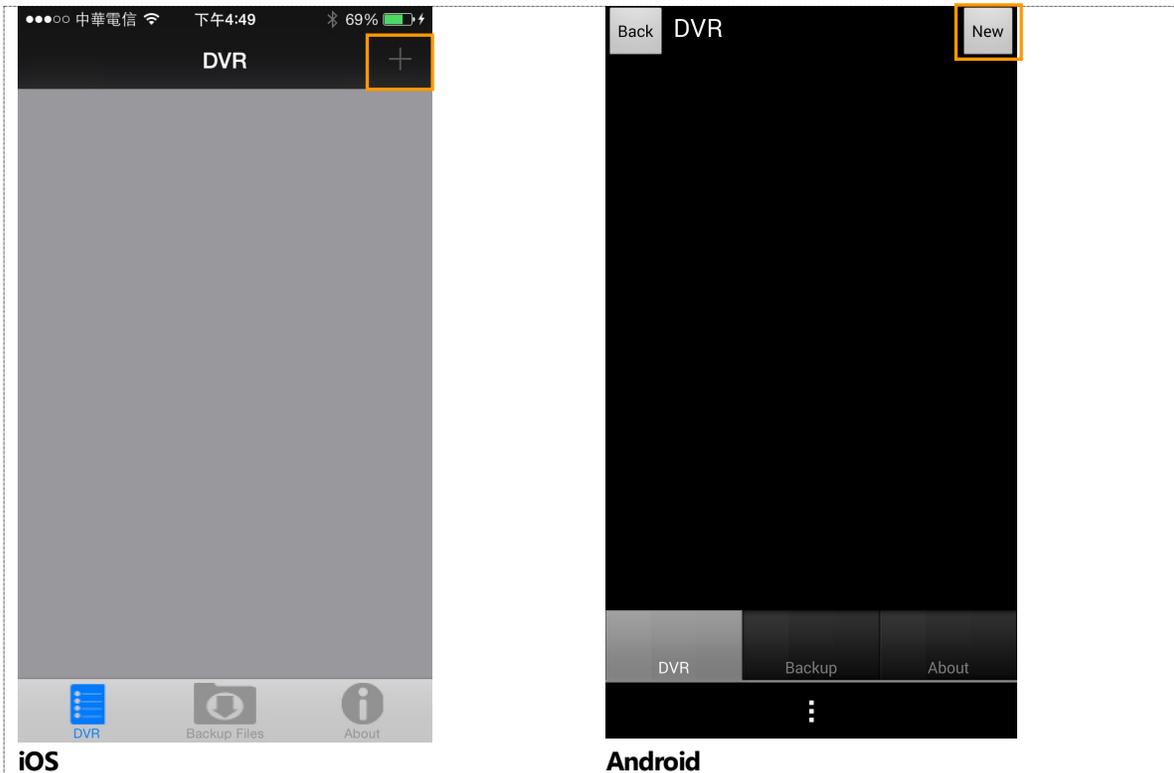


2. Click 'Scan QR code' button.

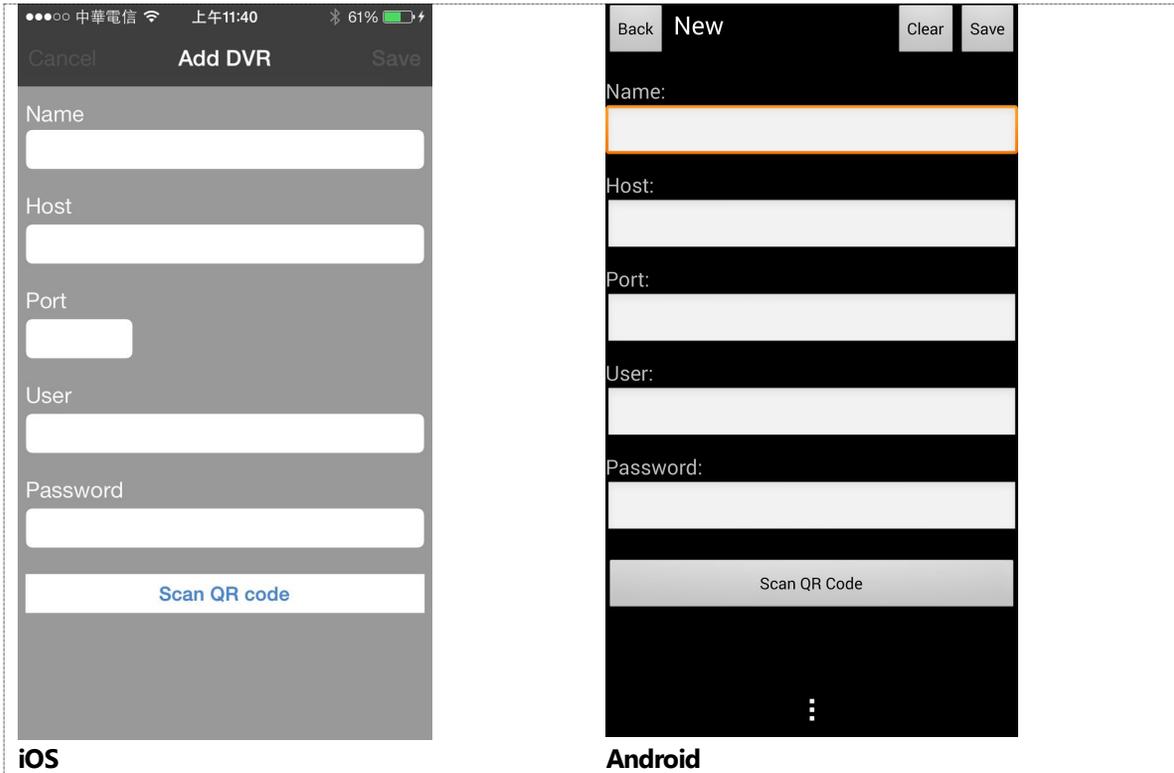

3. Scan QR code that shows on DVR *System Information* page.




4. *P2P ID* will be shown in Host field, and input the rest of fields as appropriate.

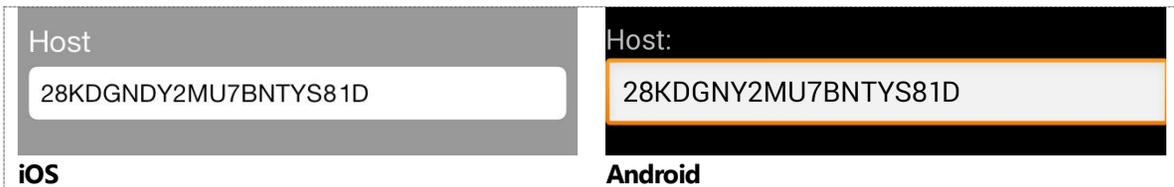


5. Click 'Save' button.

CMS

1. Open CMS software.
2. In the Setup mode View pane, select the configuration Resource.

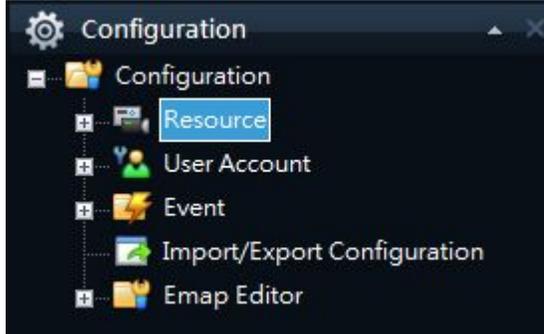

3. Device List in the main section of the CMS window will show.

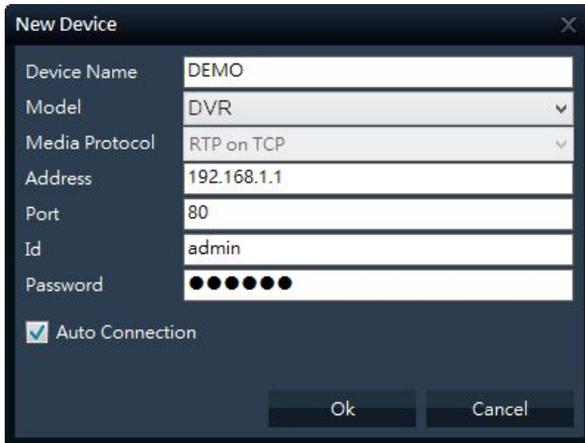

4. Select main section add to addition new device:
5. Input the **P2P ID** in Address field, input the rest of fields as appropriate.



P2P ID

6. Click 'OK' button.