

# Merit Lilin Technical Support Document


Document Number: Q00035  
Date: 10/13/2010  
Dept: Technical Support, Taipei

**Subject:** Live video of LILIN HD IP camera on iPad using Safari

## Summary:

### Access Only Live Video:

To access live video via iPad, please type in <http://192.168.0.200:554/rtspjpeg> at the URL address of Safari for accessing live video. Since RTSP streaming for JPEG is used, the default port for RTSP is 554. Please type in the URL port number accordingly.

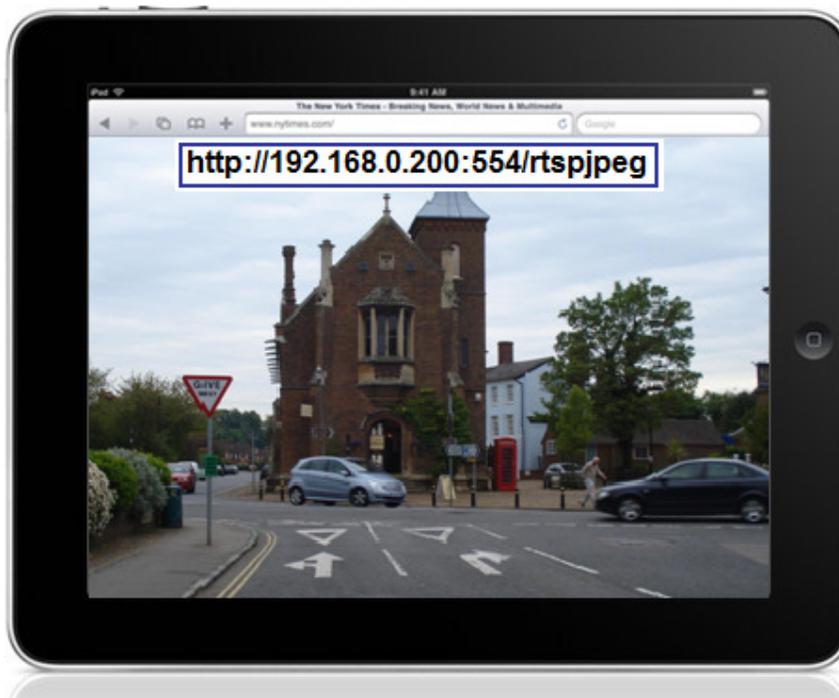


### Setup RTSP port:

To setup RTSP port, please goto web interface of the HD IP camera and click on Setup->HTTP/RTSP Service and change RTSP port number according. Make sure that you type correct RTSP port number at the URL address, when you access the HD IP camera via Safari.

A screenshot of the Network configuration interface for the HD IP camera. The interface is titled "Network" and has a blue header. Underneath, there is a section for "HTTP/RTSP Service". This section contains three rows of settings: "HTTP Port" with a text box containing "60009", "RTSP Port" with a text box containing "554", and "Video Port" with two radio buttons: "HTTP Port" (which is selected) and "RTSP/UDP Port". At the bottom of this section is a "Submit" button.

**Digital zoom:**

Digital zoom feature is allowed via iPad. To access live video, please use two fingers for expanding the area you want to perform digital zoom.

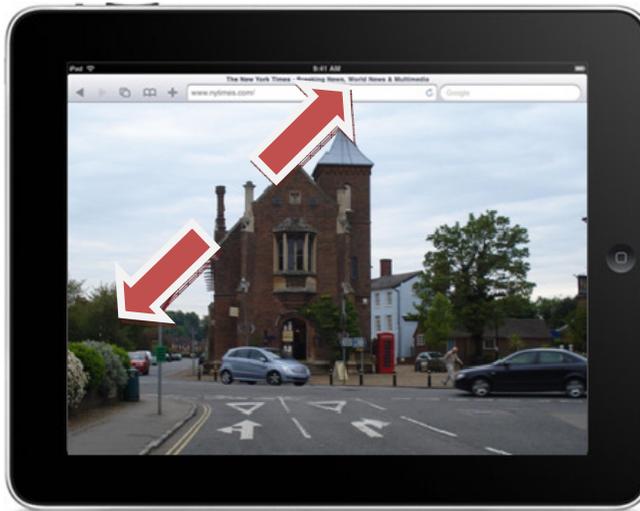**Access HD IP camera with full page mode:**

To access full page mode, please type in <http://192.168.0.200/safari.html> at the URL address of Safari. You are able to setup the settings of the HD IP camera.



**Note:** To access live video via Internet, make sure that the RTSP port number is opened accordingly.