



## How to add a LILIN HD camera to Security Spy for Mac OS X.

- First download and install Security Spy; a demo can be obtained from the Security Spy website: <http://www.bensoftware.com/securityspy/>
- Once security spy has been installed open the software.
  - From the bar at the top of the screen select 'Settings'.

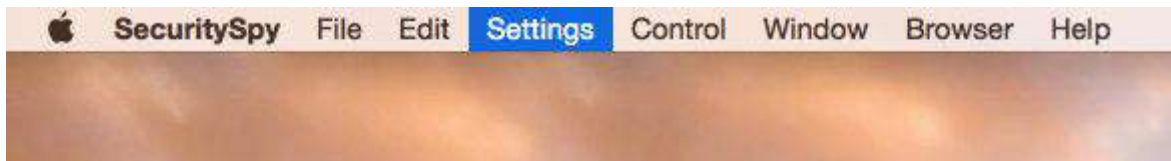

- From the settings drop down select 'Video Device Settings'.
- Once the 'video device settings' dialog box has opened select 'Network Device'

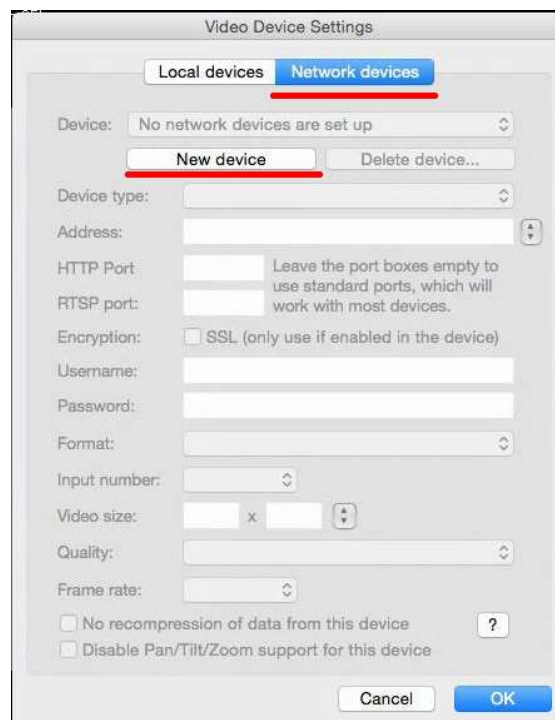

- In the network device settings select 'New Device'.
- You will need to amend the following options in the new device window for your LILIN camera to work correctly:
  - Device Type
  - Address
  - HTTP Port
  - RTSP Port
  - Username
  - Password
  - Format

Video Device Settings

Local devices Network devices

Device: New network device

New device Delete device...

Device type: SecuritySpy

Address:

HTTP Port: Leave the port boxes empty to use standard ports, which will work with most devices.

RTSP port:

Encryption:  SSL (only use if enabled in the device)

Username:

Password:

Format: JPEG HTTP (video and audio)

Input number: 0 Get input list...

Video size: x

Quality: Default

Frame rate: Default

No recompression of data from this device ?

Disable Pan/Tilt/Zoom support for this device

Cancel OK

- Below is an example of a correctly completed device settings screen.

Video Device Settings

Local devices Network devices

Device: 192.168.67.216 (Network camera)

New device Delete device...

Device type: LILIN 2 MP (1080p)

Address: 192.168.67.216

HTTP Port: 80 Leave the port boxes empty to use standard ports, which will work with most devices.

RTSP port: 554

Encryption:  SSL (only use if enabled in the device)

Username: admin

Password: .....

Format: H.264 RTSP (video and audio)

Input number:

Video size: x

Quality: Default

Frame rate: Default

No recompression of data from this device ?

Disable Pan/Tilt/Zoom support for this device

Cancel OK